

ARTICULATED BEACONS GAB-1400 TO GAB-2500



Custom-made solutions For mooring depth up to 50m

- Watch swing radius close to 0
- Positioning with great accuracy
- Low maintenance (no chain)
- No roll (although it may lean over of some degrees under the action of strong winds and currents)
- Tubular pillar divided into watertight sections assembled by bolted flanges, and hinged on a sinker by a special high duty shackle
- Sub-surface polyethylene float filled with polyurethane (PU) foam
- Cathodic protection against corrosion
- 360° rungs for an easy access to the equipment (working platform as an option)

FLOAT CHARACTERISTICS

- 1.4 or 2.0 or 2.5m diameter
- 0.8 to 5.25m³ volume


ADDITIONAL FEATURES

Height and draught

according to mooring depth and site conditions

Focal plane (m)

up to 10

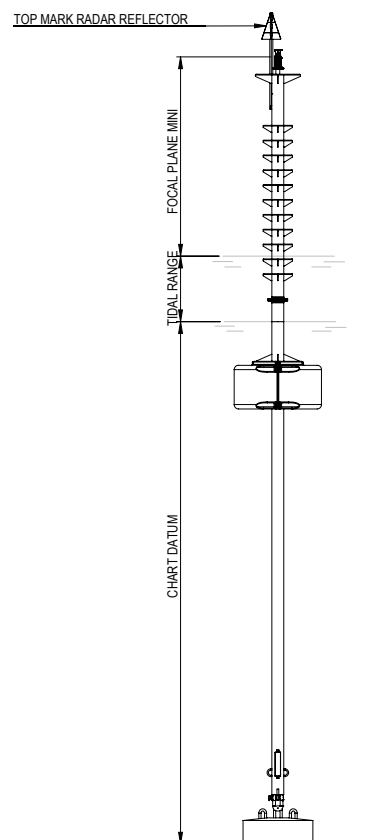

Specifications subject to change or variation without notice - 2019